



DE LOREAN MOTOR COMPANY

# SERVICE BULLETIN

NUMBER ST-04-7/81

CATEGORY: TECHNICAL

ATTENTION: ALL DMC DEALERS/SERVICE MANAGERS

SUBJECT: FRONT LICENSE PLATE BRACKET INSTALLATION

A front license plate bracket is supplied with each new De Lorean vehicle (DMC Part #108025) for front license plate mounting.

To install the bracket and mount the license plate proceed as follows:

- 1) Working on bench, drill one  $\frac{1}{2}$ " hole into the supplied bracket as indicated in figure 1. (see reverse side)
- 2) Align the middle of the supplied bracket with the center of the front fascia (DMC logo in front grille can be used as a centering aide) with the top edge of the supplied bracket level with the top of the black bumper stripe of the fascia.

Caution: The front license plate bracket is to be fastened to the front fascia with well-nuts, riv-nuts, moly-nuts or equivalent depending on local availability. Therefore, before drilling any holes into the fascia/bumper determine hole size by considering available fasteners.

3. Drill 3 holes of appropriate size into the front fascia (using the supplied bracket as a templet) as shown in figure 1. (see reverse side)
4. Insert nuts into fascia according to the suppliers instructions.
5. Position and secure the fastener for the lower center bracket mounting location.
6. Insert the license plate into the lower clip of the mounting bracket. Align the upper license plate mounting holes with upper mounting holes of the bracket and install upper fasteners.

Sincerely,

Lutz Feuerabendt  
Technical Service Manager

ISSUED 7/1/81

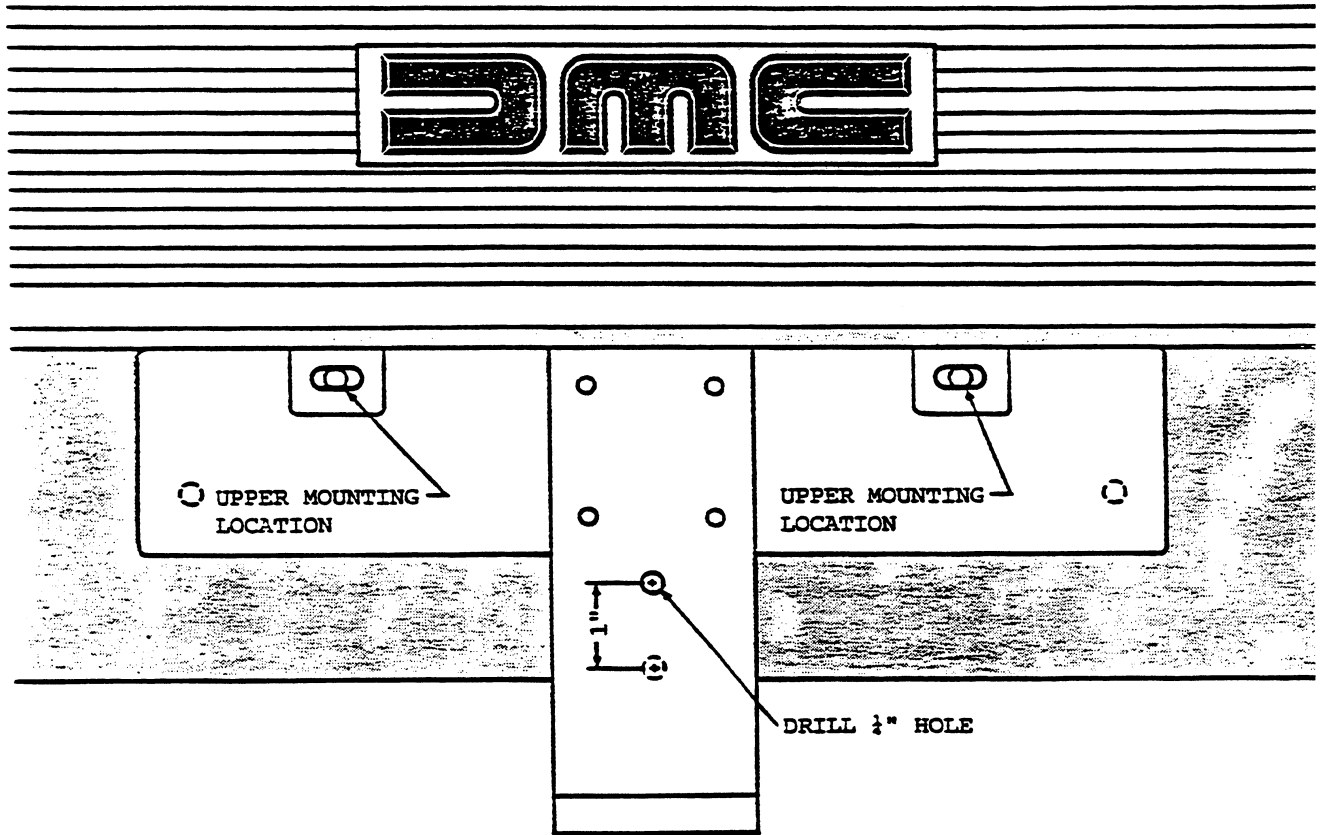


FIGURE 1